

DIMENSIONS/WEIGHT

Upper diameter (inside):	213,7 mm (b)
Upper diameter (with flange):	225,0 mm (a)
Upper diameter (with handles):	224,0 mm
Bottom diameter (external):	194,0 mm (c)
Height (with standard lid):	187,0 mm (h)
Height (with lid for foiling):	193,7 mm
Nominal capacity:	5 000 ml
Total capacity:	5 900 ml
Total usable capacity:	5 500 ml
Container weight:	143,8 g
Handle weight (strap):	5,6 g (standard)
Handle weight (short strap):	4,6 g
Handle weight (PP):	8 g (optional)
Handle weight (metal):	20,3 g (optional)
Weight tolerance:	+/- 5%
Dimension tolerance:	+/- 1 mm





PHOTO OF PRODUCT



DECORATION

	Dry offset (up to 6 colors)	IML
Width (B):	650 mm	643,0 mm
Height (H):	135 mm	169,5 mm

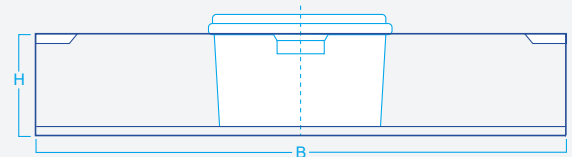

LIDS

Name: P-05FB/1
 Foiling: Yes
 Foiling: 40 g
 IML: Yes
 Offset: No



Name: P-05LB/1
 Foiling: No
 Weight: 35 g
 IML: Yes
 Offset: No



Name: P-05LB/2
 Foiling: No
 Weight: 32 g
 IML: Yes
 Offset: No



Name: P-05LB/3
 Foiling: No
 Weight: 35 g
 IML: Yes
 Offset: No




RAW MATERIAL / TRANSPORT AND WAREHOUSING


- Buckets and lids are made of polypropylene (PP)
- Warehousing: In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators.
- Filling and closing conditions: max. content temperature during filling 95°C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack. Put not more than 2 warm containers in the stack. When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.
- Load on the lower container:
 Static (T<23°C) : < 35 kg Transparent containers < 28 kg

- Transportation of filled containers: containers may be stacked to the 66% of maximal static load.
- Palletizing of containers: product with density 1,0 g/cm3 according to the customer practice giving consideration to the mentioned earlier values.
- All materials and dyes used to produce container or lid designed for the food sector are approved for food contact.
- This guarantee is valid 12 months from date of delivery. During this time, the package should be used. All packages from a single pallet should be used immediately after unpacking.
- Manufacturer is not responsible for container deformation because of stacking of single pallets or putting on them an extra load.

PALLETIZATION FILLED CONTAINERS



top view




side view

PALLETIZATION AT DELIVERY

900 units/pallet
 packaging: hood or bag

STANDARD COLOURS



The product is available in white, transparent or colored according to customer specifications