

DIMENSIONS/WEIGHT

Upper length (with flange): 286,0 mm
 Upper width (with flange): 198,6 mm
 Bottom length: 252,7 mm
 Bottom width: 164,7 mm

Height (with standard lid): 149,2 mm
 Height (with lid for foiling): 194,0 mm

Nominal capacity: 5 000 ml
 Total capacity: 6 400 ml
 Total usable capacity: 5 800 ml

Container weight: 180 g
 Handle weight (strap): -
 Handle weight (PP): 16,0 g (optional)
 Handle weight (metal): 24,0 g (optional)

Weight tolerance: +/- 5%
 Dimension tolerance: +/- 1 mm





PHOTO OF PRODUCT



DECORATION

	Dry offset (up to 6 colors)	IML
Width (B):		819,1 mm
Height (H):		126,0 mm

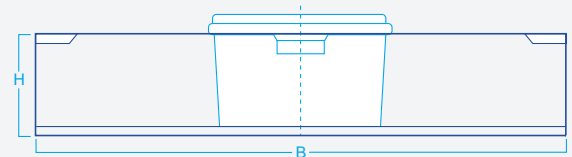

LIDS

Name: P-05PR/Bis/2
 Foiling: No
 Foiling: 59 g
 IML: Yes
 Offset: No




RAW MATERIAL / TRANSPORT AND WAREHOUSING

- Buckets and lids are made of polypropylene (PP)
- Warehousing: In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators.
- Filling and closing conditions: max. content temperature during filling 95°C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack. Put not more than 2 warm containers in the stack. When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.
- Load on the lower container:
 Static (T<23°C) : < 40 kg Transparent containers < 32 kg

- Transportation of filled containers: containers may be stacked to the 66% of maximal static load.
- Palletizing of containers: product with density 1,4 g/cm3 according to the customer practice giving consideration to the mentioned earlier values.
- All materials and dyes used to produce container or lid designed for the food sector are approved for food contact.
- This guarantee is valid 12 months from date of delivery. During this time, the package should be used. All packages from a single pallet should be used immediately after unpacking.
- Manufacturer is not responsible for container deformation because of stacking of single pallets or putting on them an extra load.


PALLETIZATION FILLED CONTAINERS



PALLETIZATION AT DELIVERY

1040 units/pallet
 packaging: hood or bag

STANDARD COLOURS



The product is available in white, transparent or colored according to customer specifications