


## DIMENSIONS/WEIGHT

Upper length (with flange):	286,0 mm
Upper width (with flange):	198,6 mm
Bottom length:	249,3 mm
Bottom width:	161,1 mm
Height (with standard lid):	266,0 mm
Height (with lid for foiling):	-
Nominal capacity:	10 000 ml
Total capacity:	11 700 ml
Total usable capacity:	10 600 ml
Container weight:	303 g
Handle weight (strap):	-
Handle weight (PP):	16,0 g (optional)
Handle weight (metal):	24,0 g (optional)
Weight tolerance:	+/- 5%
Dimension tolerance:	+/- 1 mm




## PHOTO OF PRODUCT



## DECORATION

	Dry offset (up to 6 colors)	IML
Width (B):		
Height (H):		

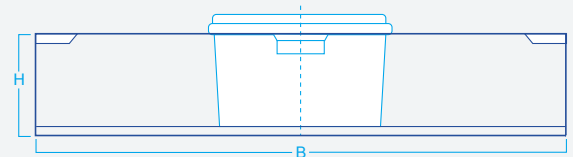

## LIDS

Name:	P-05PR/Bis/2
Foiling:	No
Foiling:	59 g
IML:	Yes
Offset:	Yes



## RAW MATERIAL / TRANSPORT AND WAREHOUSING

- Buckets and lids are made of polypropylene (PP)
- Warehousing: In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators.
- Filling and closing conditions: max. content temperature during filling 95°C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack. Put not more than 2 warm containers in the stack. When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.
- Load on the lower container:
 

Static (T<23°C) : < 45 kg	Transparent containers < 36 kg
---------------------------	--------------------------------
- Transportation of filled containers: containers may be stacked to the 66% of maximal static load.
- Palletizing of containers: product with density 1,6 g/cm3 according to the customer practice giving consideration to the mentioned earlier values.
- All materials and dyes used to produce container or lid designed for the food sector are approved for food contact.
- This guarantee is valid 12 months from date of delivery. During this time, the package should be used. All packages from a single pallet should be used immediately after unpacking.
- Manufacturer is not responsible for container deformation because of stacking of single pallets or putting on them an extra load.

## PALLETIZATION FILLED CONTAINERS



top view




side view

## PALLETIZATION AT DELIVERY

**480 units/pallet**  
 packaging: hood or bag

## STANDARD COLOURS



The product is available in white, transparent or colored according to customer specifications