


## DIMENSIONS/WEIGHT

Upper diameter (inside):	362,7 mm (b)
Upper diameter (with flange):	380,0 mm (a)
Upper diameter (with handles):	402,8 mm
Bottom diameter (external):	320,0 mm (c)
Height (with standard lid):	388,0 mm (h)
Height (with lid for foiling):	-
Nominal capacity:	33 000 ml
Total capacity:	34 500 ml
Total usable capacity:	33 000 ml
Container weight:	890 g
Handle weight (strap):	-
Handle weight (PP):	-
Handle weight (metal):	75 g (optional)
Weight tolerance:	+/- 5%
Dimension tolerance:	+/- 1 mm




## PHOTO OF PRODUCT



## DECORATION

	Screen printing (up to 2 colors)	IML
Width (B):	350 mm	
Height (H):	180 mm	

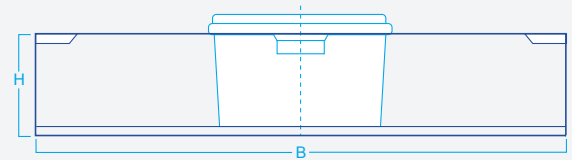

## LIDS

Name:	P-33Bis/1
Foiling:	No
Foiling:	159 g
IML:	No
Offset:	Yes




## RAW MATERIAL / TRANSPORT AND WAREHOUSING

- Buckets and lids are made of polypropylene (PP)
- Warehousing: In the case of stacking pallets with filled containers put weight uniformly, using for example proper separators.
- Filling and closing conditions: max. content temperature during filling 95°C, during stacking content temperature should be lower than 45°C. Put not more than 2 warm containers in the stack. Put not more than 2 warm containers in the stack. When temperature decrease to 25-30° containers are characterized by optimal rigidity and mechanical parameters allowing stacking for maximal static load as below.
- Load on the lower container:
 

Static (T<23°C) : < 70 kg	Transparent containers < 56 kg
---------------------------	--------------------------------
- Transportation of filled containers: containers may be stacked to the 66% of maximal static load.
- Palletizing of containers: product with density 1,6 g/cm3 according to the customer practice giving consideration to the mentioned earlier values.
- All materials and dyes used to produce container or lid designed for the food sector are approved for food contact.
- This guarantee is valid 12 months from date of delivery. During this time, the package should be used. All packages from a single pallet should be used immediately after unpacking.
- Manufacturer is not responsible for container deformation because of stacking of single pallets or putting on them an extra load.

## PALLETIZATION FILLED CONTAINERS



top view




side view

## PALLETIZATION AT DELIVERY

**180 units/pallet**  
 packaging: hood or bag

## STANDARD COLOURS



The product is available in white, transparent or colored according to customer specifications